

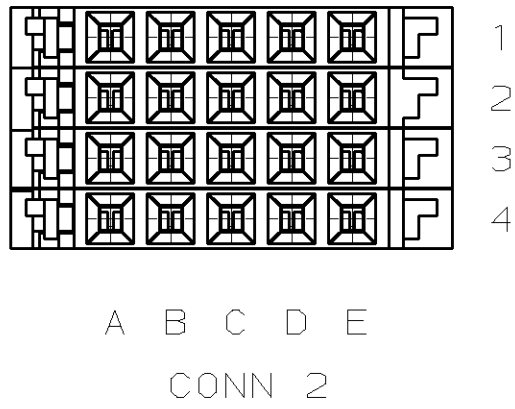
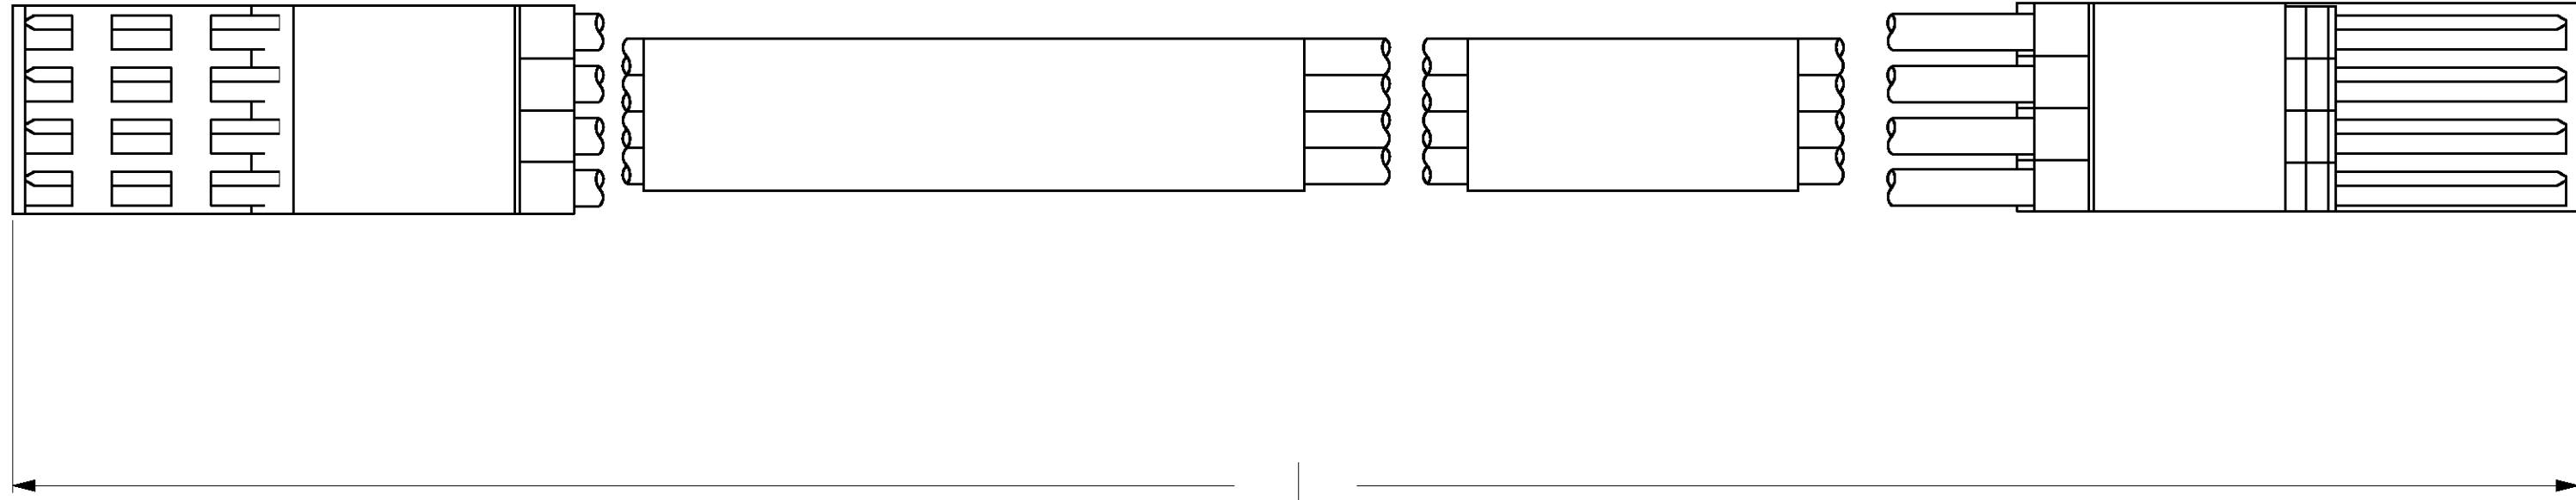
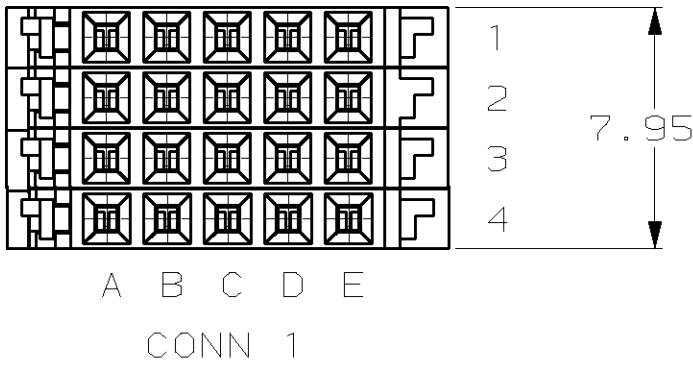


LOC	DIST	REVISIONS					
		REV	LYR	DESCRIPTION	DATE	OWN	APVD
CF	39	0		REL 95-3165-061	4-12-95	LM	CA
		A		ADDED -4, -5 0B20-0328-96	4-29-96	TS	GG
		B		REV PER 0B20-0909-96	10-11-96	TS	GG
		C		ADD -6 & -7 0B20-1153-96	12-9-96	TS	GG
		D		REV PER 0S20-0262-02	14MAY02	TS	CA

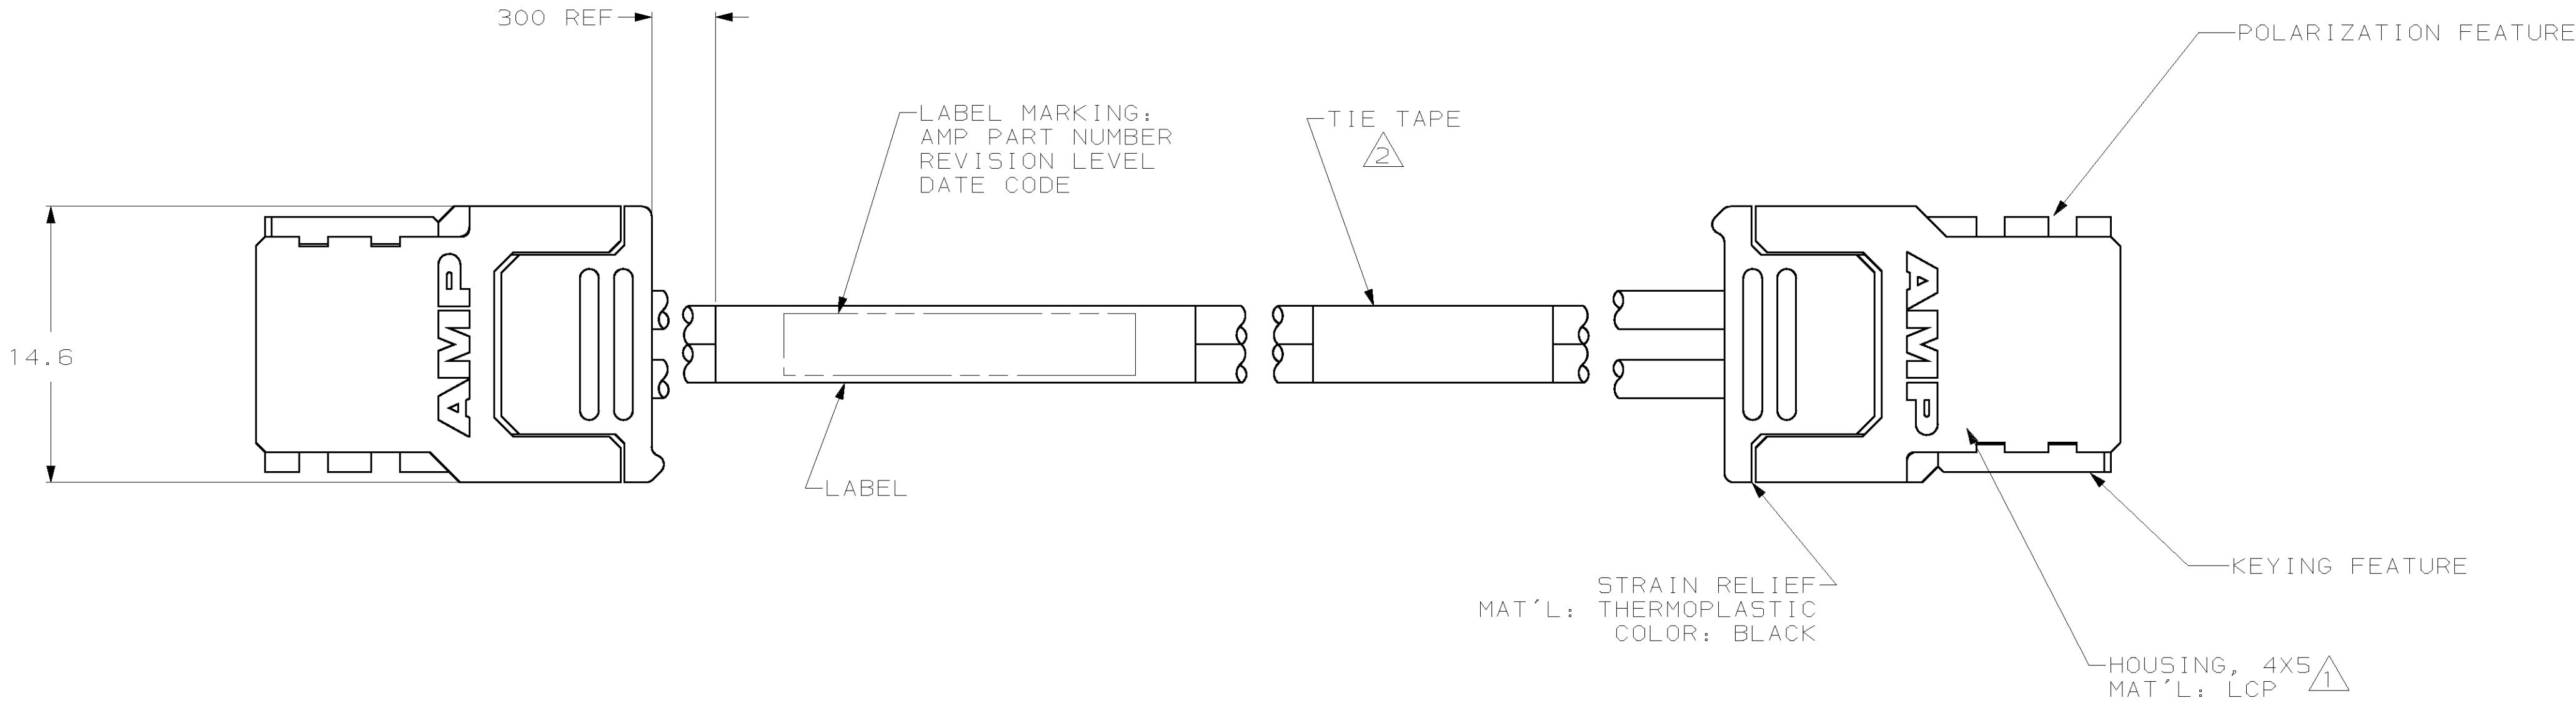

- 1 EACH HOUSING CONTAINS 5 SOCKET CONTACTS. CONTACTS ARE PLATED WITH .00038 MIN THICK GOLD OVER .00127 MIN THICK NICKEL.
- 2 ADDITIONAL TIE TAPE PLACED ON CABLE BUNDLE, SPACED EVERY 600 mm MAX.
3. MAXIMUM ALLOWABLE MATING POST LENGTH 8.5mm
4. CABLE : SIGNAL & DRAINS 28 AWG
PROPAGATION DELAY 4.265 NS/METER NOM
IMPEDANCE 100 OHMS DIFFERENTIAL NOM
SHIELD ALUMINIZED MYLAR
JACKET PVC - UL RECOGNITION

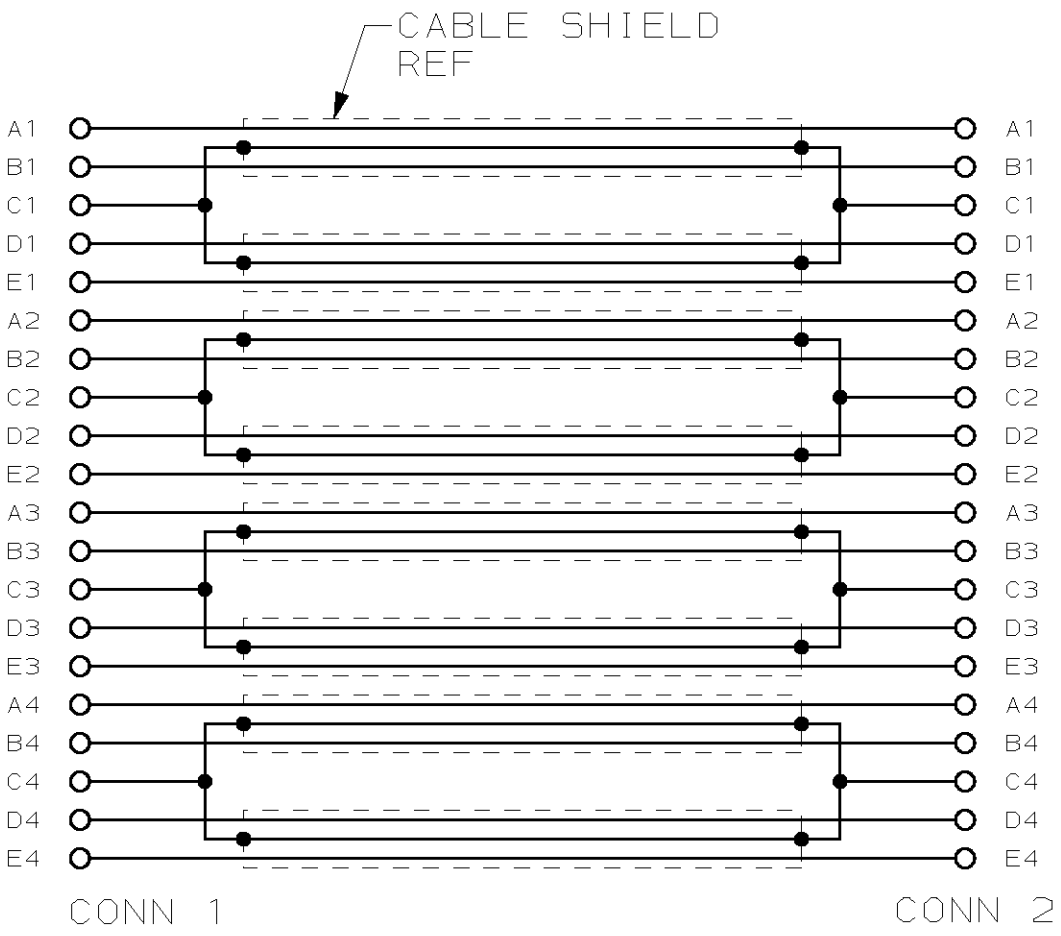

WIRING DIAGRAM

10000.0±125	621410-7
5000.0±75	621410-6
2000.0±25	621410-5
1000.0±13	621410-4
3000.0±50	621410-3
2500.0±50	621410-2
1500.0±50	621410-1
DIM	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHALL BE CONTACTED FOR THE LATEST REVISION.		DWN L. MORNINGSTAR 4-12-95	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK C. ADAMS 4-12-95	NAME C. ADAMS	
		PRODUCT SPEC	CABLE ASSEMBLY, 4 x 5, 100 OHM, 2mm HM	
		APPLICATION SPEC		
		WEIGHT		
		CUSTOMER DRAWING		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES		SIZE A1	CAGE CODE 00779	DRAWING NO C-621410
MATERIAL -		FINISH -	SCALE 4:1	SHEET 1 OF 1